

# HYBRID STOVES Infinity Plus LINE

## E228 D-S



### GENERAL CHARACTERISTICS

- Multifuoco System®: with 4 speed levels, manually or automatically controlled, optional
- Heating: Natural convection / Ductable forced ventilation
- Multicomfort / Multicomfort Plus: Standard
- Front ventilation: directional air vent
- Natural Mode: yes
- Eco / Energy saving function: yes / yes
- Cladding / Top surface: majolica / majolica
- Stove: airtight steel
- Firebox: cast iron
- Smoke baffle plate / Brazier: Aluker® / cast iron
- Door / Handle: cast iron with self-cleaning ceramic glass resistant up to 750°C / steel and silicone
- Removable ash drawer: yes
- Standard flue outlet position: top or rear
- LCD remote control: standard
- WiFi module- Bluetooth for App MyPIAZZETTA: standard
- Control panel with digital controls: yes
- Power level: 5
- Room temperature probe for temperature management: standard
- Programmable timer-thermostat: 6 daily time period settings
- Humidifier: stainless steel
- Regular brazier cleaning: yes
- Glass cleaning: continuous air flow
- Ash vacuum cleaner: standard
- Installation : wall - flush / corner
- Convection heating Majolica: yes
- Pellet Quality system function: yes
- Hybrid wood-pellet stove with natural draught: yes
- Double auger with bottom feeding: yes
- Tertiary air system in pellet mode: yes
- Flue malfunction detection sensor: yes
- Controlled unlocking system of pellet tank and door: yes
- Wood re-load warning: yes
- Pellet level indicator: on remote control

### TECHNICAL DATA

#### Top flue outlet

	E228 D-S	
	PELLET	Wood-burning
• Model	SH140-P-09	SH140-W-09
• Type	135	230
• Room heating capacity (min - max)	m³	
• Nominal heat output (min - max)	kW	3,9 - 8,0
• Thermal efficiency (min - max)	%	85,1 - 87,0
• Nominal consumption (min - max)	kg/h	0,9 - 1,8
• Hopper capacity	kg	40
• Size of wood pieces	mm	35 - 38
• Firebox opening W x H	mm	31,7 x 33,8
• Stove weight	kg	306
• PMnom (13% O <sub>2</sub> )	mg/Nm³	20
• OGCnom (13% O <sub>2</sub> )	mg/Nm³	3


#### Rear flue outlet

	E228 D-S	
	PELLET	Wood-burning
• Model	SH140-P-10	SH140-W-10
• Type	140	235
• Room heating capacity (min - max)	m³	
• Nominal heat output (min - max)	kW	4,1 - 8,2
• Thermal efficiency (min - max)	%	90,3 - 88,0
• Nominal consumption (min - max)	kg/h	0,9 - 1,9
• Hopper capacity	kg	40
• Size of wood pieces	mm	35 - 38
• Firebox opening W x H	mm	31,7 x 33,8
• Stove weight	kg	306
• PMnom (13% O <sub>2</sub> )	mg/Nm³	19
• OGCnom (13% O <sub>2</sub> )	mg/Nm³	2



CODE

VERSION	- TOP OR REAR FLUE OUTLET - COMBUSTION AIR KIT, STANDARD	
TOTAL STOVE		
Cladding	BIANCO CALCE	P06239940C
	BIANCO CALCE - NERO OPACO	P06239941C
	NERO OPACO	P06239160C
	VERDE MIRTO - NERO OPACO	P06239251C
TOTAL STOVE		
Cladding	MARRONE TENNÉ - NERO OPACO	P062393B1C
	ROSSO LAVA - NERO OPACO	P06239451C
Stove	STUFA E228 DS SCARICO SUPERIORE	P07228400C
<b>Accessories on request</b>		
Multifuoco System® single		P08020860C
Flexible pipe Ø 12 cm for combustion air		P08010360

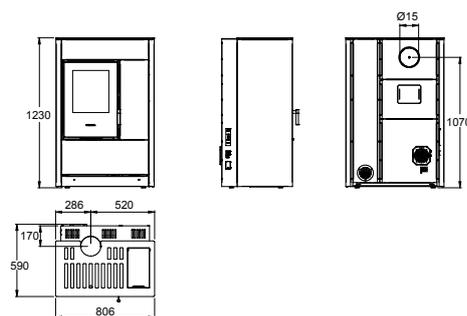

Dimensions in mm.